

Subject to change without prior notice



**PRODUCT DESCRIPTION:**

Standard supply includes:

- Thermal protector (130°C);
- Power cord (with CEE22 plug);
- Shock mounts (code 1505001);
- Silencer (code 9002025);

ZA rocking piston pumps combines the best characteristics of traditional piston pumps and diaphragm pumps into small units with excellent features. This series is ideal for use in applications where oil-mist is undesirable. Should the system require under vacuum starts it is necessary to install a three ways solenoid valve. Moreover, the oil-free design makes the maintenance intervals very long.

Main accessories	ZA 200P
Spare part kit	K9210033
Hose fitting	2103004 (Ø9)
Inlet filter	9001003
Condensate separator filter	9001013
Vacuum regulating valve	9004012
Vacuum gauge	9009009
Shock mount "cup" type	4 x 1502003

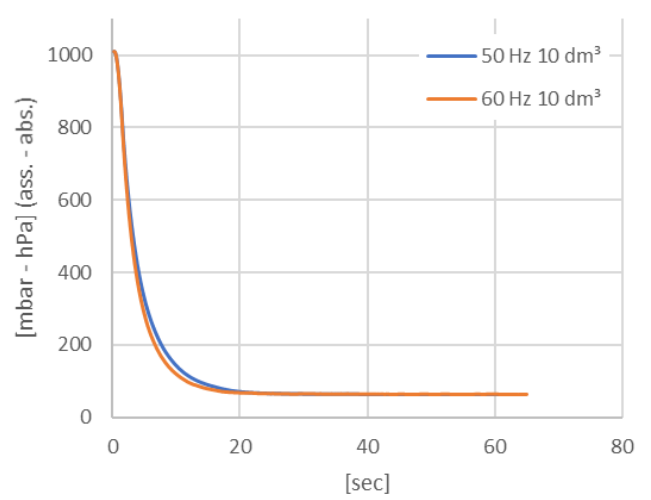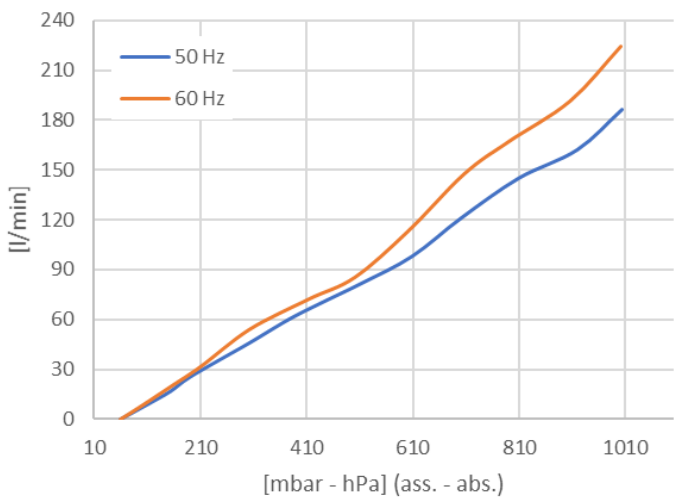

NOTE: Curves refers to 1013mbar (abs.) pression and 20°C temp. (tolerance ±10%).

		ZA 200P	
		50Hz	60Hz
Catalog code		9210033	
Nominal capacity	l/min	186	224
Total final pressure (Abs)	mbar - hPa	60	
Motor power	(1~) kW	0,58	
Nominal r.p.m.	n/min	1480	1775
Noise level (UNI EN ISO 2151 – K 3dB)	dB(A)	59	
Weight	(1~) kg [N]	11,5 [112,8]	
Duty type		S1	
Operating temperature @ 20°C	°C	40 ÷ 45	45 ÷ 50
Required room temp. for place of installation	°C	7 ÷ 40	
Ambient temperature for storage / transport	°C	-20 ÷ 50	
Max humidity altitude		80% / 1000m s.l.m. *	

(\*) Please contact us if environmental conditions are different from those prescribed

Subject to change without prior notice