



Main accessories	ZB 12
Disposable inlet filter	1803003
Non-return valve	9007021

STANDARD equipment
Shock mounts
Silencer
Thermal protector (120°C)

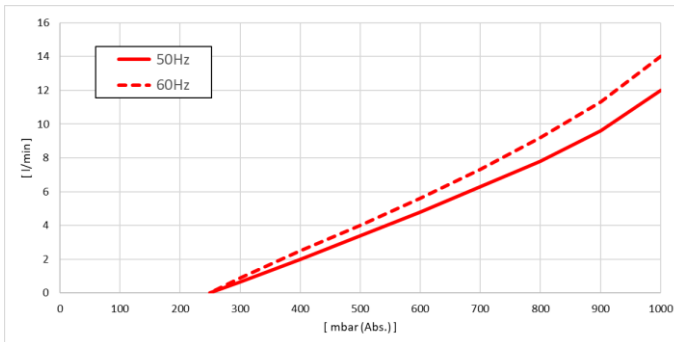

NOTA: Curve riferite alla pressione di 1013mbar (ass.) e temp. 20°C (tolleranza ±10%).

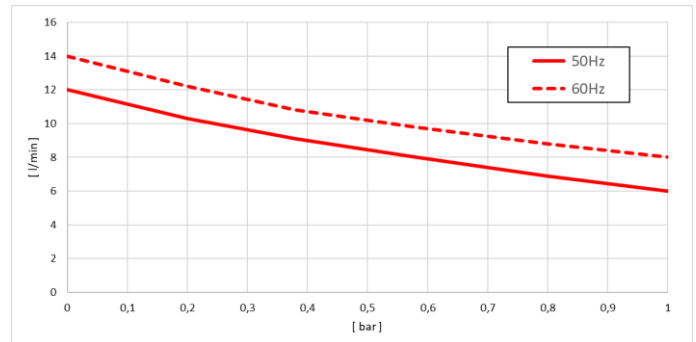

NOTE: Curves refers to 1013mbar (abs.) pression and 20°C temp. (tolerance ±10%).

Subject to change without prior notice

		ZB 12		
		50Hz	60Hz	60Hz
Catalog code		9210036		9210035
Nominal capacity	l/min	12	14	14
Total final pressure (Abs)	mbar - hPa	250		
Maximum over pressure	Bar – 10 <sup>5</sup> Pa	1	///	1
Power supply	V	230±10%		115±5%
Motor power *	W	60		85
Current drawn	A	0,4	0,3	1,2
Noise level (UNI EN ISO 2151 – K 3dB)	dB(A)	50	53	53
Duty type		S1		
Weight	kg [N]	1,35 [13,24]		
Required room temp. for place of installation	°C	0 ÷ 40		
Ambient temperature for storage/transport	°C	-20 ÷ 50		
Max humidity / altitude		80% / 1000m s.l.m. **		

(\*) Required power

(\*\*) Please contact the Manufacturer if environmental conditions are different from those prescribed