

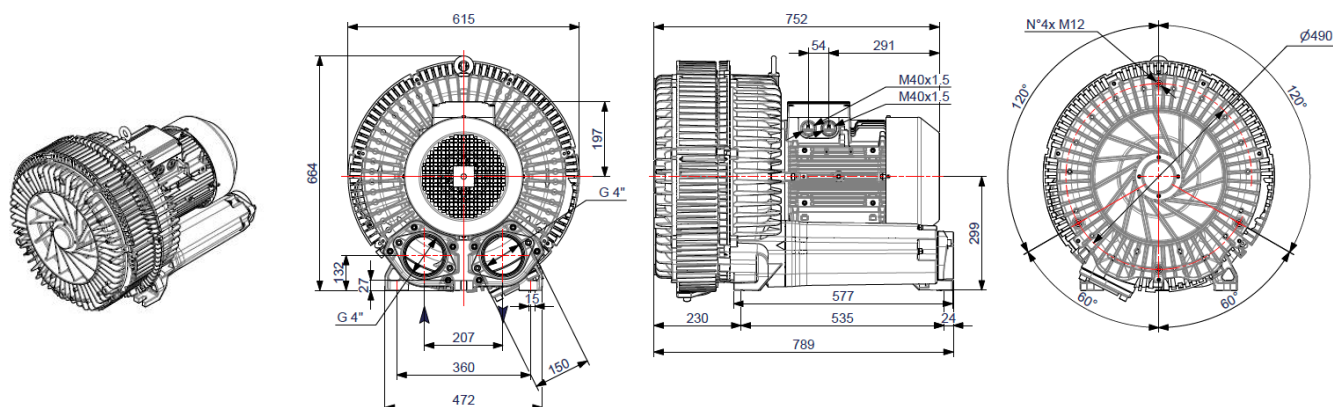


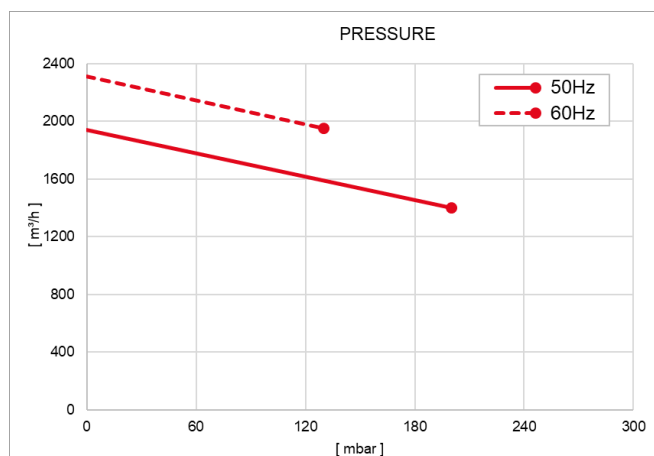

Model		TPL 2000-1	
		50Hz	60Hz
Catalogue code		9416010	
Motor power (3~) kW		20.0	23.0
IE3	Power supply V $\pm$ 10% (Δ / Y)	400 / 690	460 / 795
	Efficienza – Efficiency %	92.7	91.7
Power supply V $\pm$ 5% (Δ / Y)		345-415 / 600-720	380-480 / 660-830
Absorption A (Δ / Y)		44.1-36.6 / 25.3-21.1	50.8-40.3 / 26.9-23.3
Flow rate m ³ /h		1940	2310
Vacuum mbar		-220	-160
Pressure mbar		+200	+130
Noise level (UNI EN ISO 2151 - K 3dB) dB(A)		75	84
Weight kg [N]		212 [2077.6]	

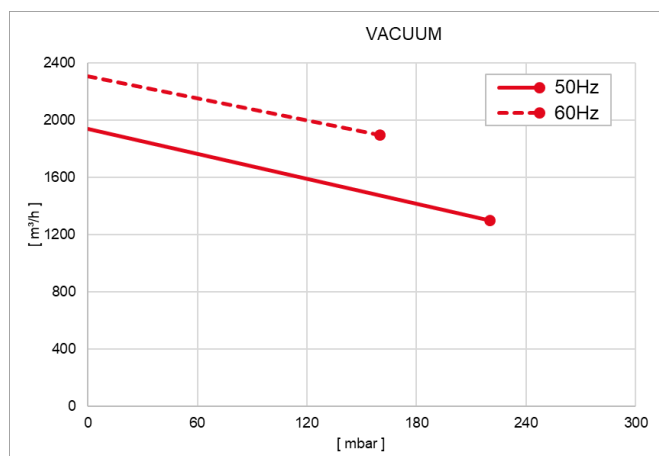

Curves refer to 1013mbar (Abs.) pression and 20°C temperature (tolerance $\pm$ 10%)